




BOARD-LEVEL MATERIAL SOLUTIONS

UNDERFILLS AND ENCAPSULANTS

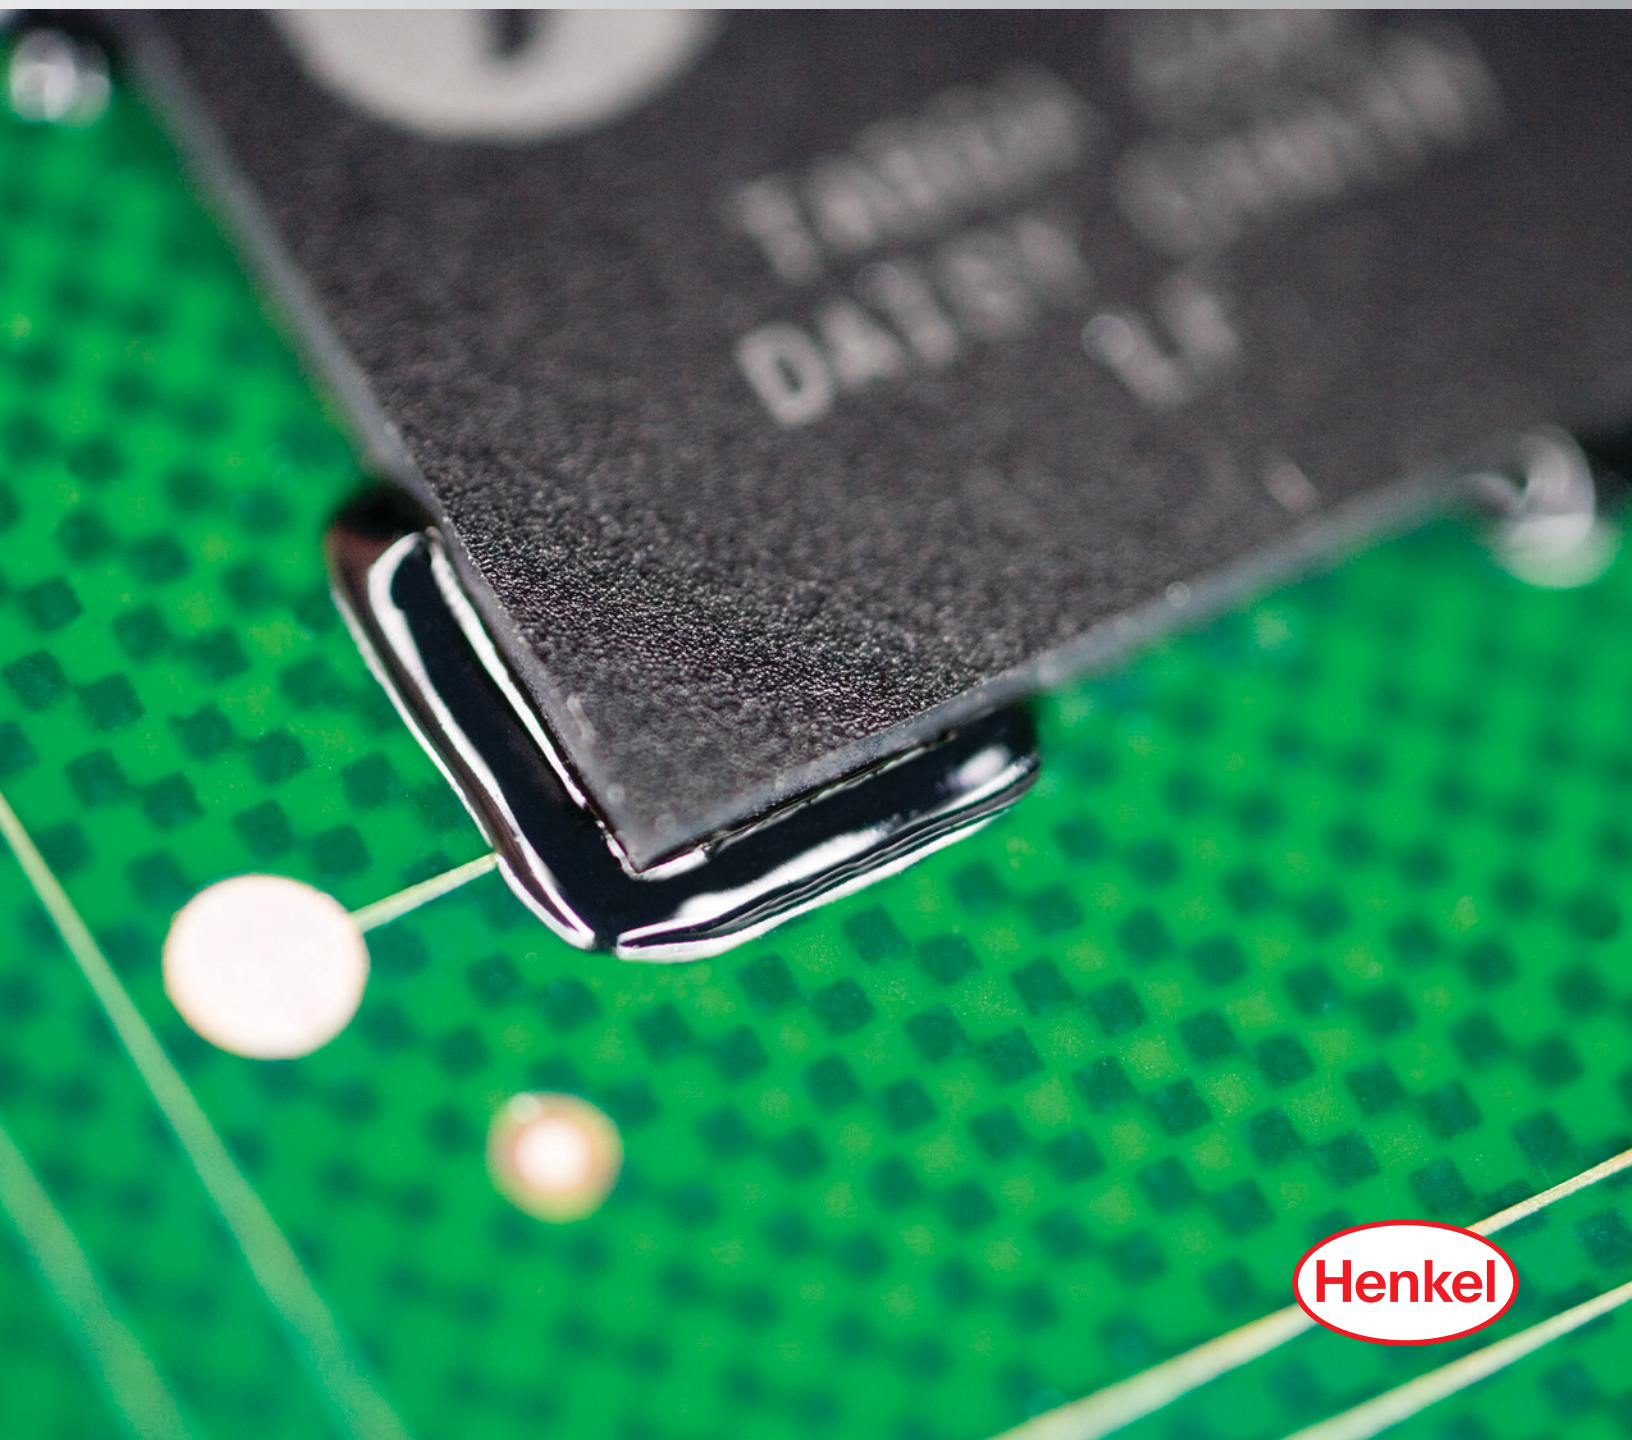


Henkel

INTRODUCTION

Protection from drop, thermal shock, water and other potentially damaging environmental influences is critical for long-term reliability of electronic products. This is even truer today, as smaller, higher-density designs, finer-pitched devices and increasingly delicate componentry are integrated into advanced assemblies. As the electronics market's premiere materials formulator and supplier, Henkel's expertise in underfill and encapsulant development is providing assembly specialists with materials that offer essential device protection, while accommodating ease-of-use and streamlined processing for safeguarding and reinforcement of BGAs, CSPs, PoPs, LGAs and WLCSPs. Characteristics such as fast cure, room temperature flowability, high reliability, reworkability and excellent SIR performance are built in to Henkel's broad portfolio of underfill and encapsulant materials, making them ideal for consumer, industrial, automotive, medical and aerospace applications.

PRODUCT PORTFOLIO

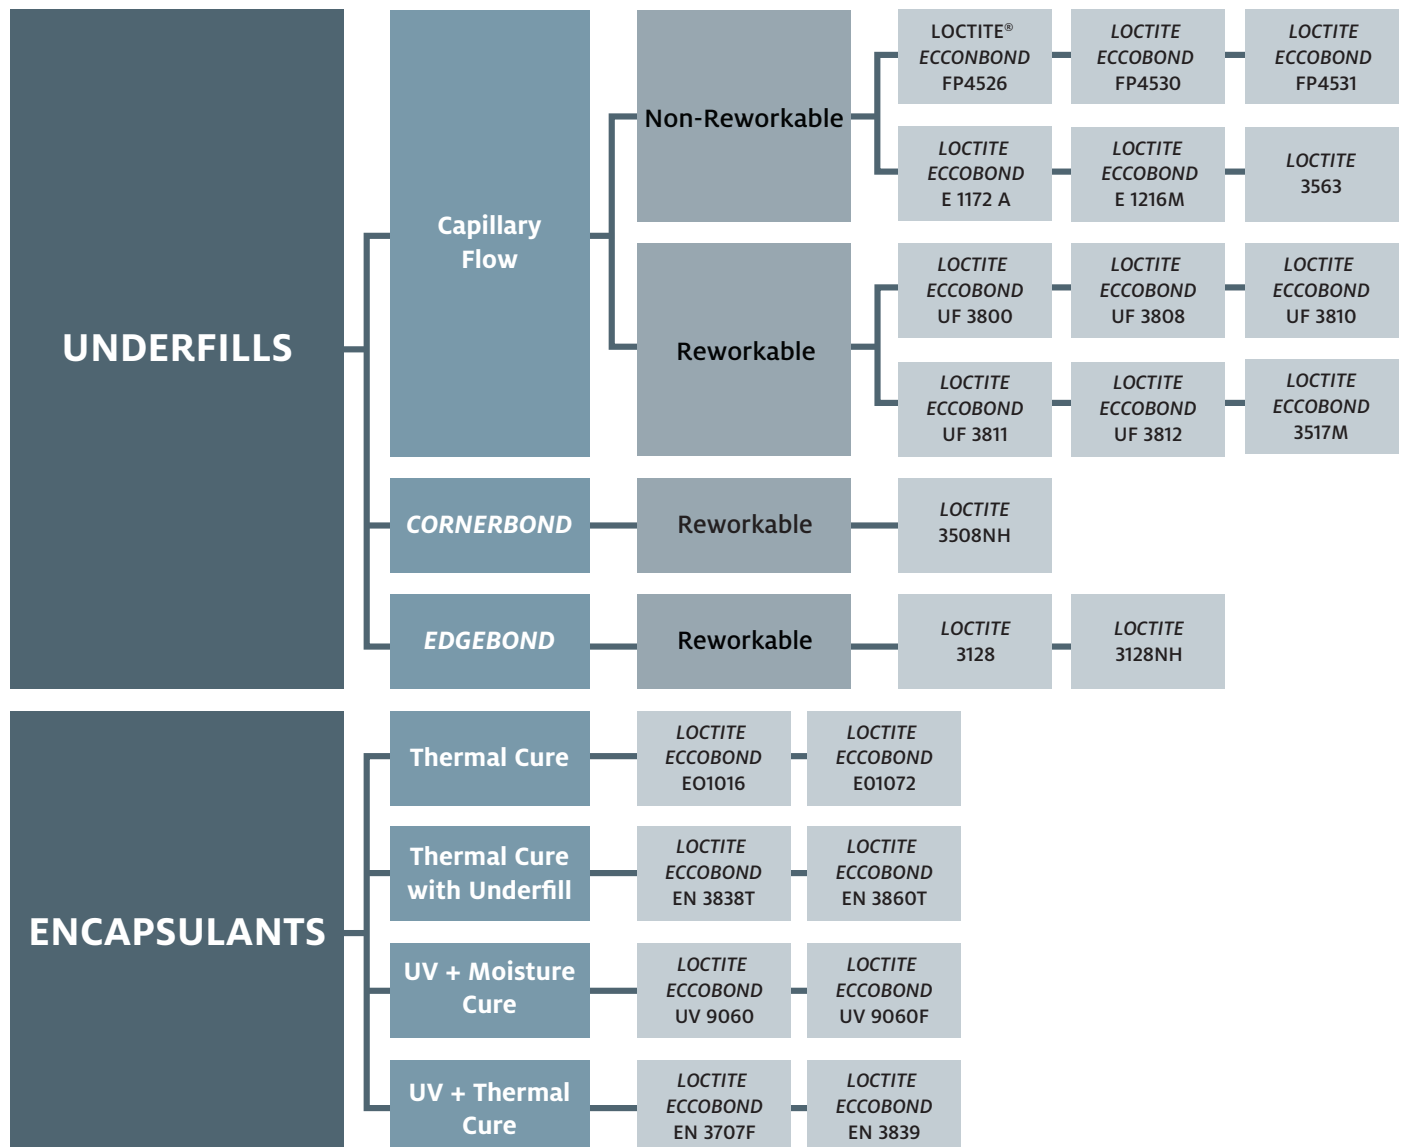


UNDERFILLS

Henkel has designed a broad range of underfill solutions to satisfy a variety of device reinforcement requirements. From capillary flow underfills for BGAs, CSPs, PoPs, LGAs and WLCSPs to materials that enhance flip chip reliability, our formulations alleviate interconnect stress while enhancing thermal and mechanical performance. For applications where full underfill is not required, LOCTITE® CORNERBOND and EDGEbond technologies provide a cost-effective solution, with strong perimeter reinforcement and self-centering capability for high reliability assembly.

NON-REWORKABLE CAPILLARY UNDERFILLS

Product	Key Attributes	Viscosity	Cure Condition	Reliability Rating	Coefficient Of Thermal Expansion, CTE (ppm/°C)		Glass Transition Temperature, T _g (°C)
					Below T _g	Above T _g	
LOCTITE ECCOBOND FP4526	- For capillary flow on flip chip applications with excellent reliability - Suitable for application that require high thermal cycling performance	4,700 cP at 10 rpm	15 min. at 165°C (heat sink or hot plate)	★★★★★	33	101	133
LOCTITE ECCOBOND FP4530	- For flip chip on flex applications with a 25 µm gap - Material color will change from blue to green when cured	3,500 cP at 20 rpm	7 min. at 160°C	★★★★★	46	150	145
LOCTITE ECCOBOND FP4531	For flip chip on flex applications with a 25 µm gap	10,000 cP at 20 rpm	7 min. at 160°C	★★★★★	28	104	161
LOCTITE ECCOBOND E 1172 A	- For use with very fine area array devices with 25 µm geometries where transparent processing is critical - Uniform and void-free encapsulant underfill - minimizes induced stress at the solder joint to improve thermal cycling performance	17,000 cP at 5 rpm	6 min. at 135°C	★★★★★	27	85	135
LOCTITE ECCOBOND E 1216M	- For high volume assembly operations requiring a very fast flowing underfill that fully cures in a single reflow cycle, but is stable enough to be easily shipped and used in large volume cartridges - Formulated to eliminate anhydride-type curing agents	4,000 cP at 20 rpm	10 min. at 130°C	★★★★★	35	131	125
LOCTITE 3563	- Rapid curing, fast flowing, liquid epoxy designed for packaged integrated circuits such as CSPs and BGAs - Can penetrate gaps as small as 25 µm - When fully cured, it minimizes induced stress at the solder joint to improve thermal cycling performance	5,000 – 12,000 cP at 20 s ⁻¹	7 min. at 150°C	★★★★☆	35	110	130

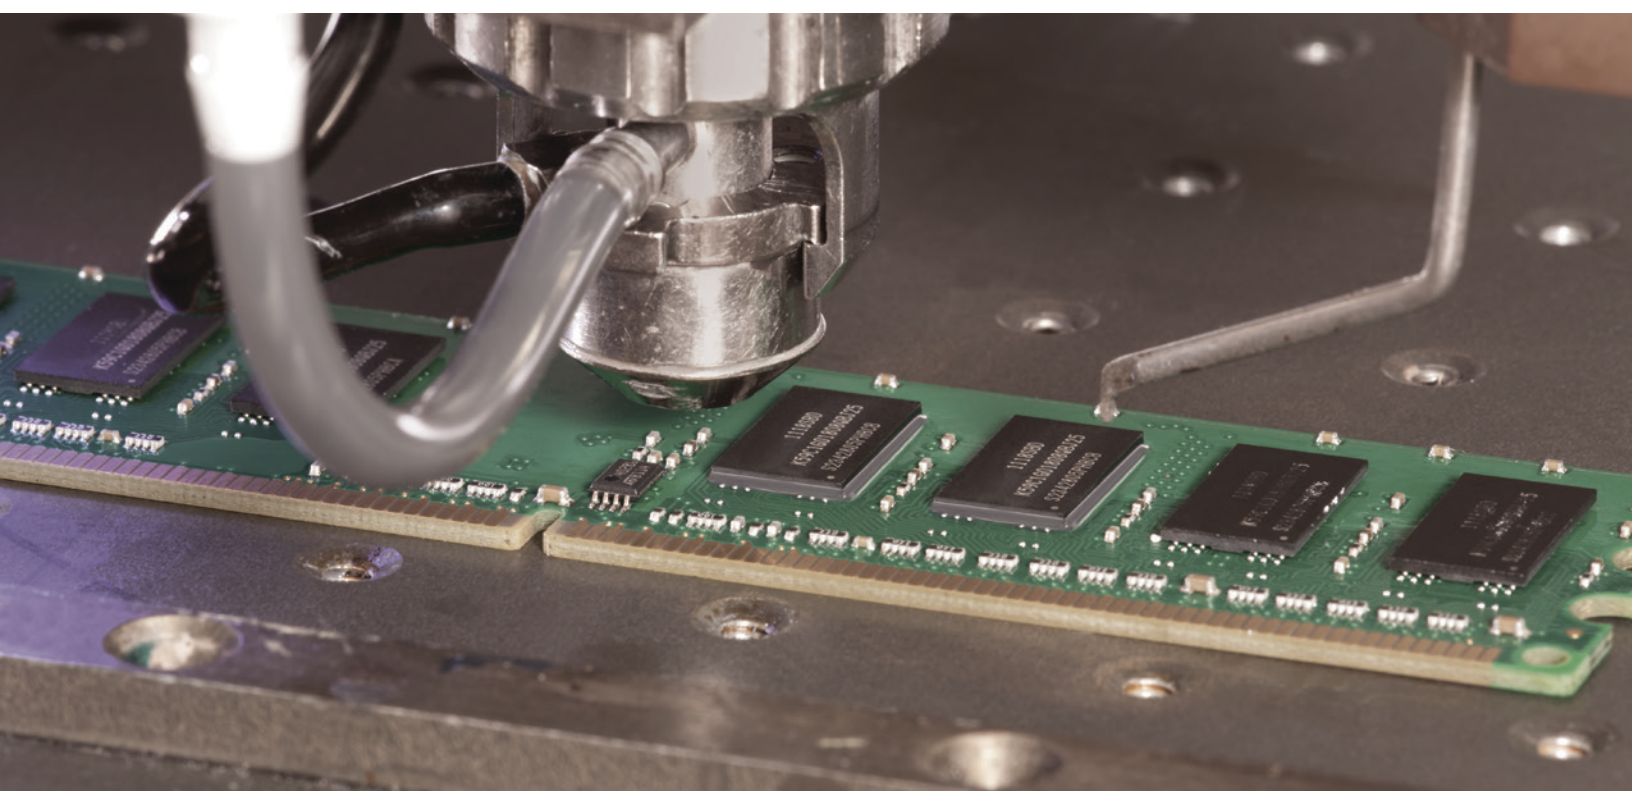

REWORKABLE CAPILLARY UNDERFILLS

Product	Key Attributes	Viscosity	Cure Condition	Reliability Rating	Reworkability Rating	Coefficient Of Thermal Expansion, CTE (ppm/°C)		Glass Transition Temperature, T _g (°C)
						Below T _g	Above T _g	
<i>LOCTITE ECCOBOND</i> UF 3800	- Designed for CSP and BGA applications - Cures quickly at moderate temperatures to minimize stress to other components - Good mechanical stress protection for solder joints	375 cP at 1000 s ⁻¹	8 min. at 130°C	★★★★☆	★★★★★	52	188	69
<i>LOCTITE ECCOBOND</i> UF 3808	- Cures quickly at low temperatures to minimize stress to other components - Excellent mechanical properties protect solder joints during thermal cycling	360 cP at 1000 s ⁻¹	8 min. at 130°C	★★★★☆	★★★★☆	55	171	113
<i>LOCTITE ECCOBOND</i> UF 3810	- Higher T_g version of <i>LOCTITE ECCOBOND</i> UF 3800 - Designed for CSP and BGA applications - Cures quickly at moderate temperatures to minimize stress to other components - Excellent mechanical properties protect solder joints during thermal cycling	394 cP at 1000 s ⁻¹	8 min. at 130°C	★★★★☆	★★★★☆	55	171	102
<i>LOCTITE ECCOBOND</i> UF 3811	- Designed for CSP and BGA applications - Low viscosity material flows at room temperature with no additional preheating required - Cures quickly at moderate temperatures to minimize stress to other components - High T_g while maintaining flexibility in order to protect solder joints during thermal cycling and drop testing	354 cP at 1000 s ⁻¹	10 min. at 130°C	★★★★☆	★★★★☆	61	190	124
<i>LOCTITE ECCOBOND</i> UF 3812	- Designed for CSP, WLCS and BGA applications - Low viscosity material flows at room temperature with no additional preheating required - Cures quickly at moderate temperatures to minimize stress to other components - High T_g and high fracture toughness enable excellent protection of solder joints during thermal cycling	350 cP at 1000 s ⁻¹	10 min. at 130°C	★★★★☆	★★★★☆	48	175	131
<i>LOCTITE ECCOBOND</i> 3517M	Provides solder joint protection against mechanical stress in handheld electronic device applications	2,600 cP at 36 s ⁻¹	5 min. at 120°C	★★★★☆	★★★★☆	65	191	101


CORNERBOND AND EDGEbond UNDERFILLS

Product	Key Attributes	Viscosity	Cure Condition	Reliability Rating	Reworkability Rating	Coefficient Of Thermal Expansion, CTE (ppm/°C)		Glass Transition Temperature, T _g (°C)
						Below T _g	Above T _g	
Cornerbond								
LOCTITE 3508NH	- Designed to cure during Pb-free solder reflow while allowing self-alignment of components - Can be pre-applied to the board at the corners of the pad site using a standard surface mount adhesive dispenser	70,000 cP at 36 s ⁻¹	Lead-free profile at 245°C	★★★☆☆	★★★☆☆	65	175	118
Edgebond								
LOCTITE 3128	- One-part epoxy - Excellent adhesion on a wide range of materials in considerably short time - Typical applications include memory cards and image sensors - Low-temperature cure is ideal for heat sensitive components	35,000 cP at 5 rpm	20 min. at 80°C	★★★☆☆	★★★★☆	40	130	45
LOCTITE 3128NH	- Designed to add reliability to CSPs and other electronic components - Low-temperature cure is ideal for heat sensitive components	35,000 cP at 5 rpm	20 min. at 80°C	★★★☆☆	★★★★☆	40	130	45

ENCAPSULANTS

Henkel's epoxy-, acrylate- and silicone-based liquid encapsulants deliver protection from moisture, water and solder overflow during thermal processing, while reinforcing mechanical strength. Highly versatile and adaptable, our materials provide excellent flow control, strong adhesion to a variety of substrates and can be cured with UV or heat.

Product	Key Attributes	Viscosity		Thixotropic Index	Reliability Rating	Reworkability Rating
		Measurement	Test Method			
Thermal Cure						
LOCTITE ECCOBOND EO1016	- Epoxy encapsulant with excellent handling properties - Cured material survives severe thermal shock and offers continuous service to 177 °C - Particularly suited for use on transistors and similar semiconductors - Can be used for encapsulation of watch integrated circuits	62,000 cP at 2 rpm	Brookfield Spindle 6	1.1 (2/20 rpm)	★★★★★	★☆☆☆☆
LOCTITE ECCOBOND EO1072	- Unique rheology allows the same product to be used as both a dam and fill encapsulant - For applications requiring excellent handling properties	100,000 cP at 2 rpm	Brookfield Spindle 7	1.25 (2/20 rpm)	★★★★★	★☆☆☆☆
Thermal Cure with Underfill						
LOCTITE ECCOBOND EN 3838T	- Flexible, low T_g material for encapsulating components on a circuit board - Material provides physical protection and stable electronic performance and protection in temperature/humidity/bias testing when cured	6,700 cP at 20 rpm	Brookfield CP51	5.8 (2/20 rpm)	★★★★☆	★★★★★
LOCTITE ECCOBOND EN 3860T	- CSP/BGA encapsulant formulated to have low viscosity and good flow performance - Cures quickly at low temperatures to minimize thermal stress to other components and provide rapid device throughput	1,000 cP at 1000 s ⁻¹	Physica CP50-1	1.0 (2/20 rpm)	★★★★☆	★★★★☆
UV + Moisture Cure						
LOCTITE ECCOBOND UV 9060	No flow, UV + moisture cure encapsulant designed for local circuit board protection	2,000 cP at 50 s ⁻¹	TA Rheometer, 2° cone	4.5 (5/50 s ⁻¹)	★★★★☆	★★★★☆
LOCTITE ECCOBOND UV 9060F	- No flow, UV + moisture cure encapsulant designed for local circuit board protection - Product is fluorescent when viewed with UV light	2,100 cP at 50 s ⁻¹	TA Rheometer, 2° cone	5.2 (5/50 s ⁻¹)	★★★★☆	★★★★☆
UV + Thermal Cure						
LOCTITE ECCOBOND EN 3707F	- No flow encapsulant designed for local circuit board protection - Cures in seconds when exposed to the appropriate intensity of UV light - Contains a secondary thermal cure initiator	3,480 cP at 20 rpm	Brookfield CP51	4.1 (2/20 rpm)	★★★★☆	★★★★☆
LOCTITE ECCOBOND EN 3839	- Flexible, low T_g material for encapsulating components on a circuit board - Provides physical and electrical protection and stable electronic performance in temperature/humidity/bias testing	7,871 cP at 5 rpm	Brookfield CP51	4.1 (0.5/5 rpm)	★★★★☆	★★☆☆☆

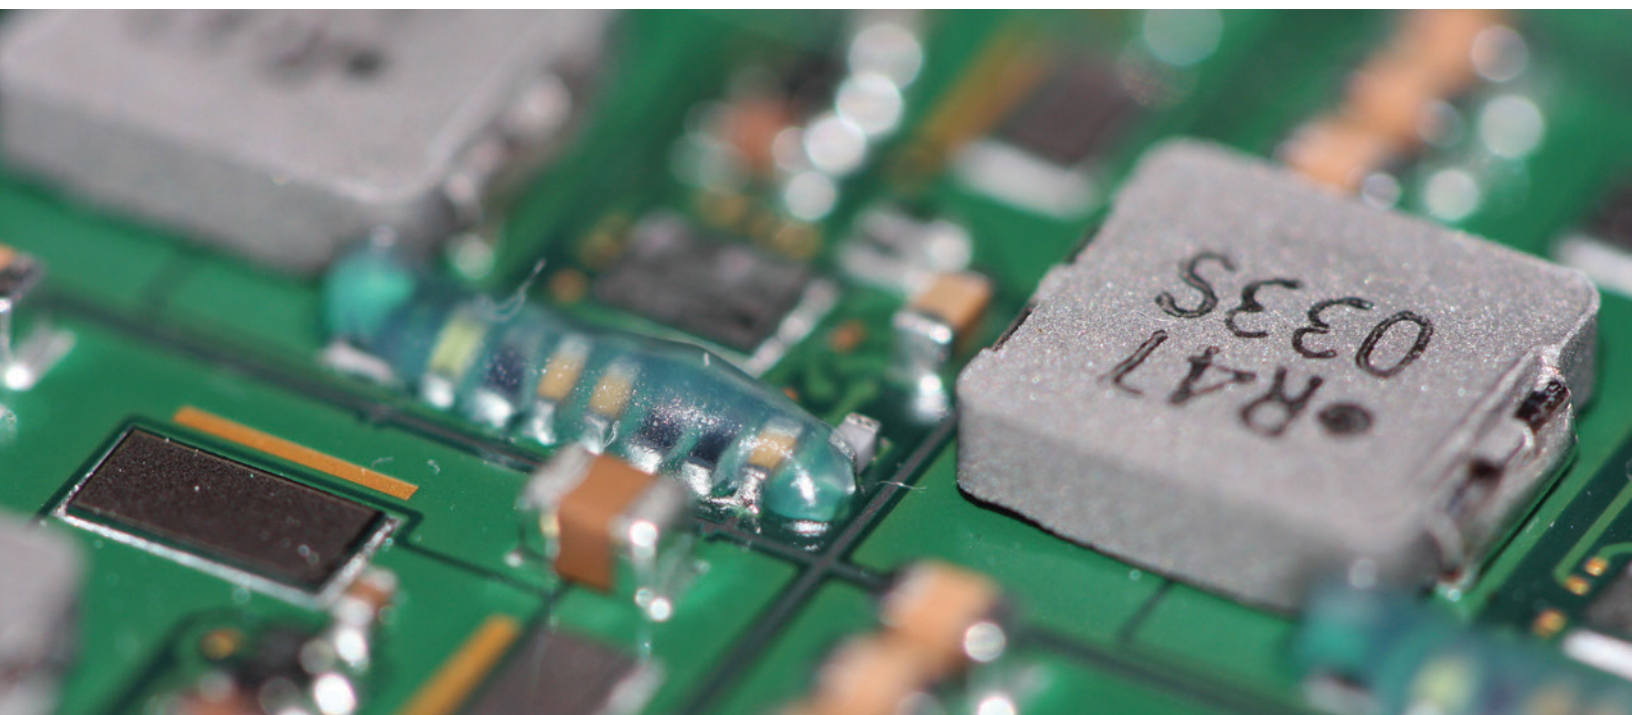



AMERICAS

UNITED STATES

Henkel Corporation
14000 Jamboree Road
Irvine, CA 92606
United States
Tel: +1.888.943.6535
Fax: +1.714.368.2265

Henkel Corporation
20021 Susana Road
Rancho Dominguez, CA 90221
United States
Tel: +1.310.764.4600
Fax: +1.310.605.2274

Henkel Corporation
18930 W. 78th Street
Chanhassen, MN 55317
United States
Tel: +1.952.835.2322
Tel: +1.800.347.4572
Fax: +1.952.835.0430

BRAZIL

Henkel Brazil
Av. Prof. Vernon Kriebel, 91
06690-070 Itapevi, Sao Paulo
Brazil
Tel: +55.11.3205.7001
Fax: +55.11.3205.7100

ASIA-PACIFIC

CHINA

Henkel Management Center
Building 7, No. 99 Jiang Wan Cheng Road
Shanghai 200438,
China
Tel: +86.21.2891.8000
Fax: +86.21.2891.8952

ABLESTIK (Shanghai) LIMITED
No. 332 Meigui South Road
WaiGaoQiao Free Trade Zone, Pu Dong
Shanghai 200131,
China
Tel: +86.21.2702.5888
Fax: +86.21.5048.4169

JAPAN

Henkel Japan Ltd.
27-7, Shin Isogo-cho
Isogo-ku Yokohama, 235-0017
Japan
Tel: +81.45.286.0161
Email: jp.ae-csdesk@henkel.com

KOREA

Henkel Korea Co Ltd.
18th Floor of tower B, BYC High City Bldg
Gasan Digital 1-ro, Geumcheon-gu,
Seoul, 08506
South Korea
Tel: +82.2.6150.3000
Fax: +82.2.6947.5203

SINGAPORE

Henkel Singapore Pte Ltd.
401, Commonwealth Drive
#03-01/02 Haw Par Technocentre,
Singapore 149598
Tel: +65.6266.0100
Fax: +65.6472.8738 / +65.6266.1161

TAIWAN

Henkel Taiwan Ltd.
10F, No. 866, Zhongzheng Road,
Zhonghe District, New Taipei City, 23586
Taiwan
Tel: +866.2.22271988
Fax: +866.2.22268699

EUROPE

BELGIUM

Henkel Belgium N.V.
Nijverheidsstraat 7
B-2260 Westerlo
Belgium
Tel: +32.1457.5611
Fax: +32.1458.5530

UNITED KINGDOM

Henkel Ltd.
Adhesives Limited Technologies House
Wood Lane End
Hemel Hempstead
Hertfordshire HP2 4RQ
United Kingdom
Tel: +44.1442.278000
Fax: +44.1442.278071

Across the Board, 
Around the Globe.

henkel-adhesives.com/electronics

